


Mirage Millennium Series Console and Split Console

MC/SMC - MM/SMM 09 to 18



Technical features

Set reference		MC/SMC - MM/SMM				
Models		09	13	15	18	
Cooling capacity	Btu/h	9 350	13 000	15 350	18 000	
	kW	2.74	3.80	4.50	5.25	
Heating capacity	kW	2.50	2.85	2.85	2.85	
Power supply	V/Ph/Hz	230 / 1 / 50 + E				
Power input	kW	1.15	1.60	2.10	2.35	
Running current	Cooling	A	7.0	8.5	11.5	
	Heating	A	10.5	12.5	12.5	
Starting current	A	18	25	28	35	
Indoor airflow (low - high speed)	m³/h	425 - 525	550 - 600	550 - 600	750 - 828	
Condensate removal	l/h	0.99	1.48	1.84	2.50	
Fresh air	m³/h	58	80	80	90	
Dimensions - Console (indoor excl. condenser)	H (mm)	530	530	530	530	
	W (mm)	900	900	900	1 090	
	D (mm)	215	215	215	215	
Net weight	kg	70	77	78	86	
Dimensions Split units	Indoor unit	H (mm)	530	530	530	530
		W (mm)	900	900	900	1 090
		D (mm)	215	215	215	215
	Outdoor unit	H (mm)	385	385	385	385
		W (mm)	745	745	745	745
Net weight	Indoor unit	kg	18	19	19	22
	Outdoor unit	kg	49	50	51	57
Pipe sizes	Suction	mm	12.7			
	Liquid	mm	6.35			

Units are rated in accordance with ISO DIS 5151. Test conditions - Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB / 24°C WB. Built to QMS ISO 9001:2000

IMPORTANT NOTE:



1. External louvres **must** conform YORK specifications.
2. The condenser section **must** extend **through** the wall and to within 20 mm of the louvre.
3. If the gap exceeds 20 mm a vertical divider plate **must** be installed to prevent short cycling.

Galvanised Steel Wall Sleeve

Available with aluminium louvre or integrated with pressed steel louvre.

PLEASE NOTE

This sleeve has a ± 10 mm fall to the rear along the bottom. Please ensure that box is installed with top level.

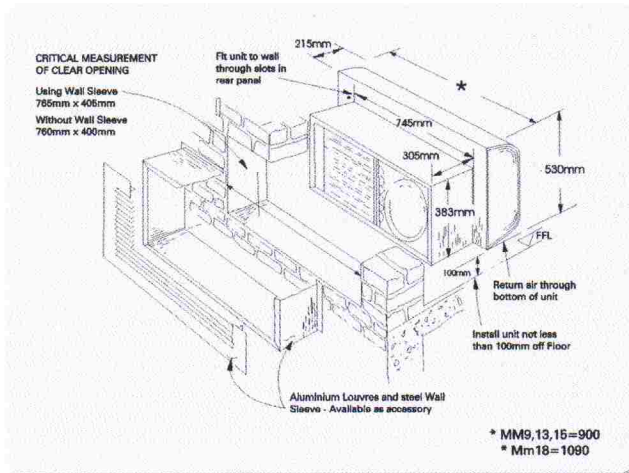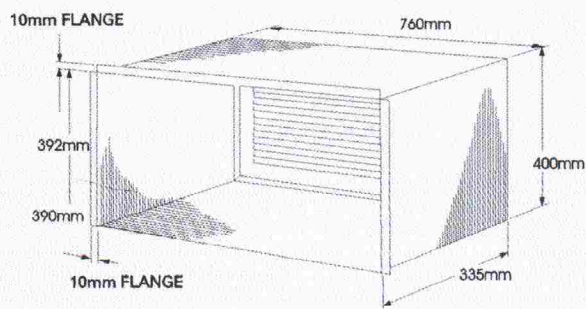

SA-COM-M0942 Manufacturer reserves the rights to change specifications without prior notice.

