


PROP FANS

- Materials of construction: Mild steel
- Finish: Epoxy paint
- Fan arrangement: Impeller mounted in tracking ring
- Motor side and impeller side guards included
- Direction of airflow: Over motor to impeller
- Power supply: 230 Volt 1 phase 50 Hx
380 Volt 3 phase 50 Hz
- Motor enclosure: IP 44

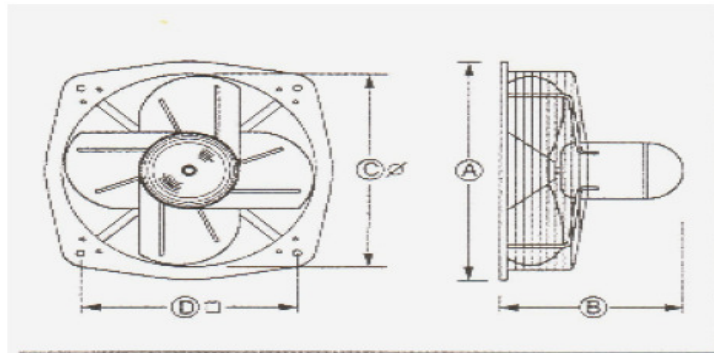

Fan dia. mm	Fan speed r/min	Volts/Phase	Amps	Watts	Fan mass kg	Dim A mm	Dim B mm	Dim D mm	Fixing hole dia.
230	1450	230/1		50		296	196	235	9 mm
300	1450	230/1		130	9.8	386	240	308	9 mm
400	1450	230/1			11.4	480	249	380	9 mm
400	1450	380/3		200	11.4				
400	960	230/1			11.4	556	284	432	11 mm
450	1450	230/1			16.9				
450	1450	380/3		380	16.9				
600	1450	230/1		800	27.0	720	327	570	13 mm
600	960	230/1			25.7				
600	960	380/3		380	25.7				

Fan performance curves based on plate mount arrangement.

Performance characteristics exclude screen losses

